RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Compliant with RoHS and REACH

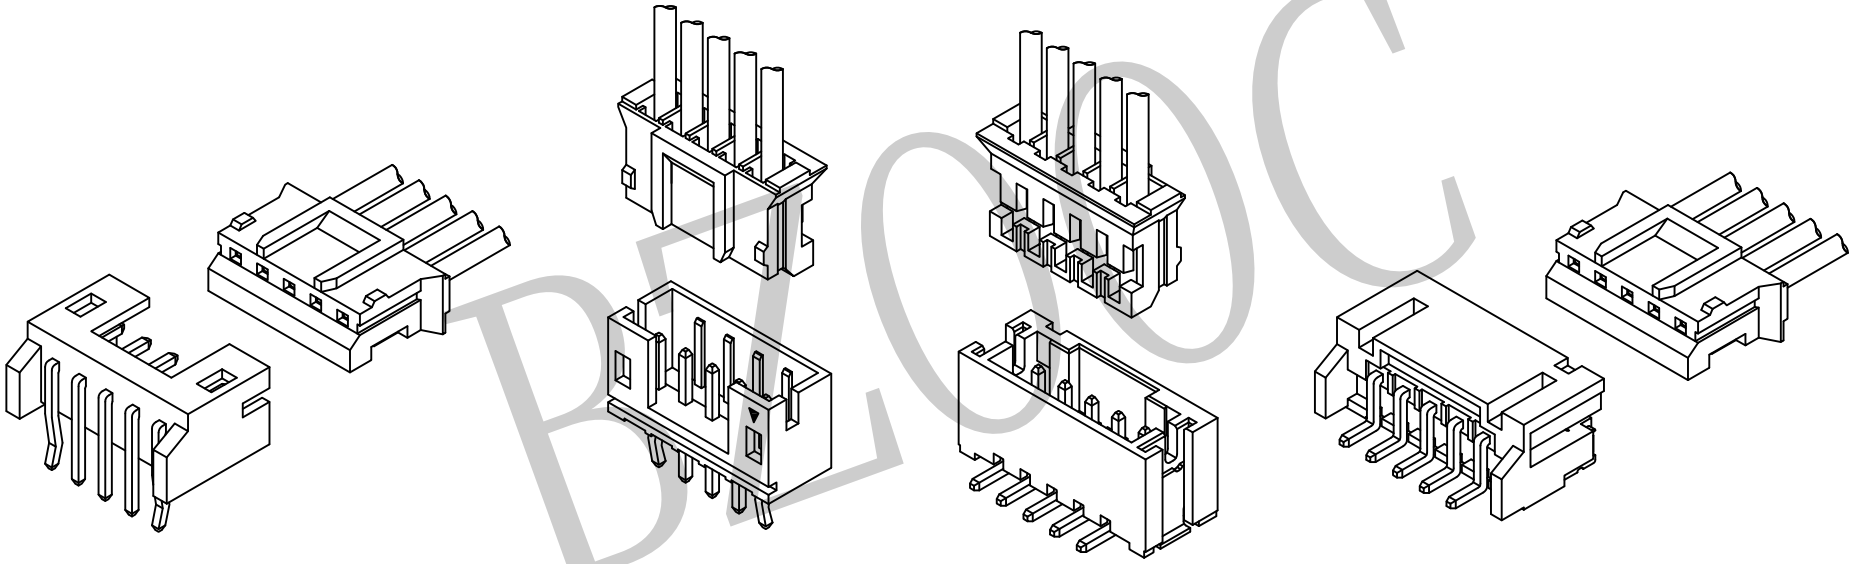

BZOOC

REV.	ECN. NO.	APR.	DATE
A0	FIRST RELEASE	Y.L	2019.06.21

TOLERANCE UNLESS OTHERWISE SPECIFIED		APR.	TITLE:
.X± 0.35	X.°± 1.5°	AX.T	2.00MM PITCH CRIMP TERMINAL TYPE2
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

东莞市柏洲电子有限公司
Dongguan Bzooc Electronics, Ltd

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

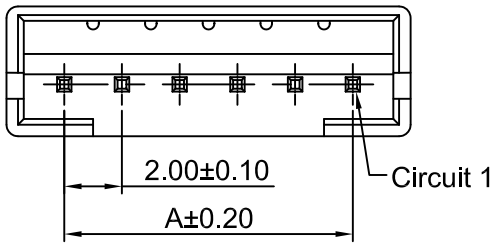



P.C.B LAYOUT



WV1



WV2



WV3



PIN NO.	Dimensions A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00
17P	32.00	36.00
18P	34.00	38.00
19P	36.00	40.00
20P	38.00	42.00

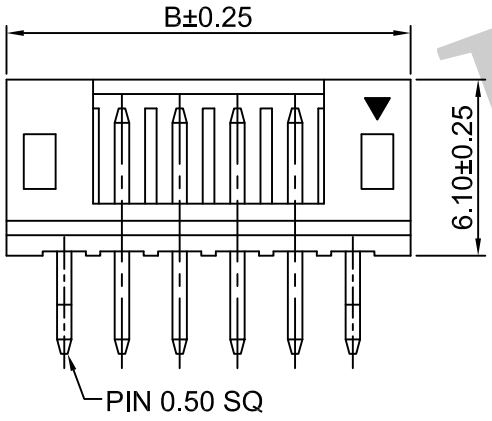

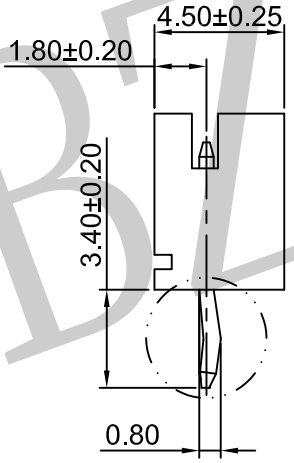

W 200-020-1XX-WV1-SN-C-P-WE-000

WAFER
200:间距2.0MM
02:WAFER TYPE2
0:UL94V-0
PIN:
102:1*2P
103:1*3P
.....
120:1*20P
WV1:180°
WV2:180° K脚朝后
WV3:180° K脚朝前
SN:镀锡
C:PA66
P：袋装
WE:白色
流水码

BZOOC

TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. AX.T	TITLE: 2.00MM PITCH 180° WAFER TYPE2
.X± 0.35	X.°± 1.5°		
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

东莞市柏洲电子有限公司
Dongguan Bzooc Electronics,Ltd

REV.	ECN. NO.	APR.	DATE
A0	FIRST RELEASE	Y.L	2019.06.21

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

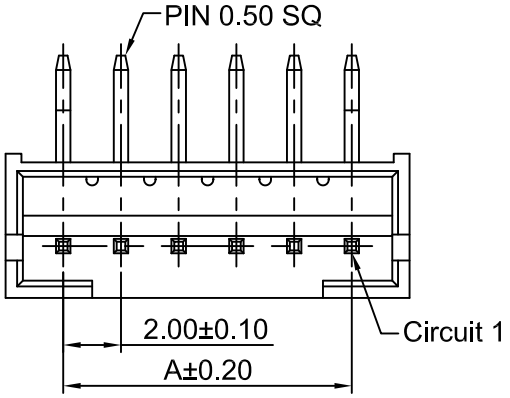



P.C.B LAYOUT



PIN NO.	Dimensions A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00
17P	32.00	36.00
18P	34.00	38.00
19P	36.00	40.00
20P	38.00	42.00

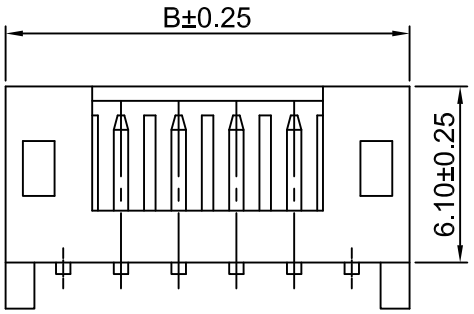

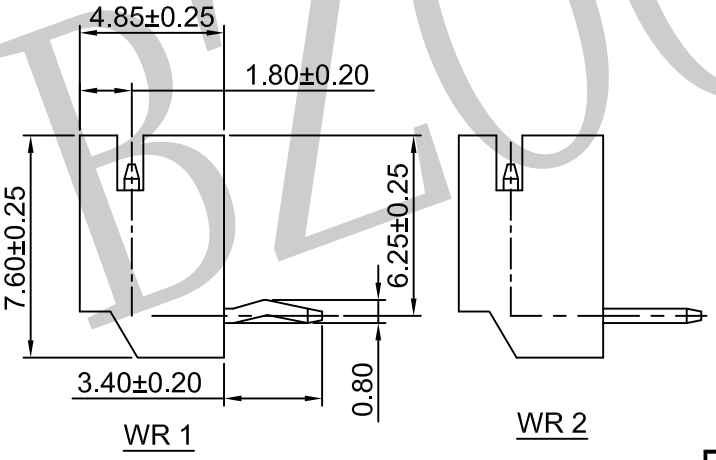

WR 1

WR 2

W 200-020-1XX-WR1-SN-C-P-WE-000

- WAFER
- 200:间距2.0mm
- 02:WAFER TYPE2
- 0:UL94V-0
- PIN:
  - 102:1*2P
  - 103:1*3P
  - .....
  - 120:1*20P
- WR2:90°
- WR1:90° 带K脚
- SN:镀锡
- C:PA66
- P：袋装
- WE:白色
- 流水码

BZOOC

TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. AX.T	TITLE: 2.00MM PITCH 90° WAFER TYPE2
.X± 0.35	X.°± 1.5°		
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

东莞市柏洲电子有限公司
Dongguan Bzooc Electronics, Ltd

REV.	ECN. NO.	APR.	DATE
A0	FIRST RELEASE	Y.L	2019.06.21

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

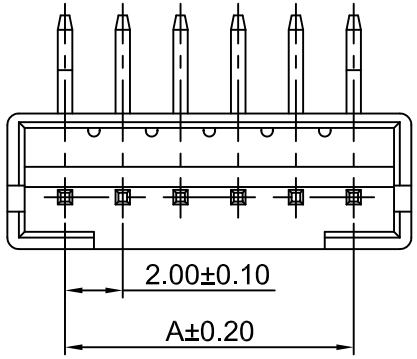



P.C.B LAYOUT



PIN NO.	Dimensions A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00
17P	32.00	36.00
18P	34.00	38.00
19P	36.00	40.00
20P	38.00	42.00

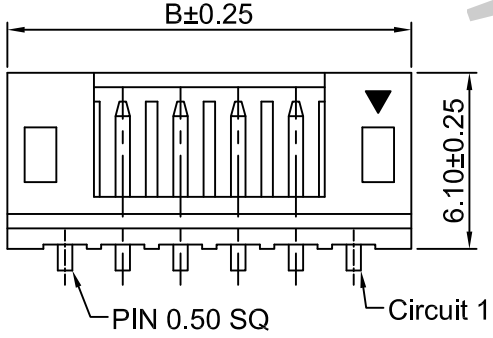

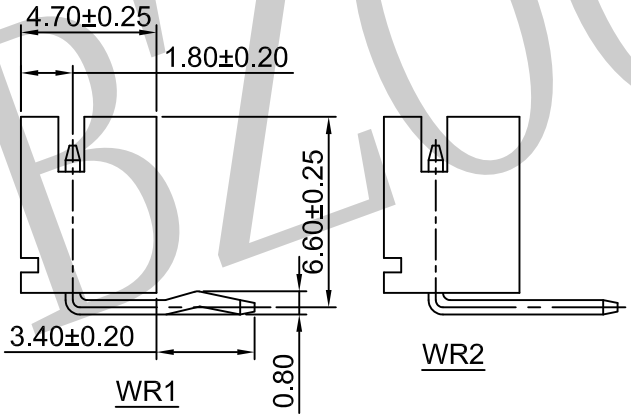

W 200-020-1XX-WR2-SN-C-P-WE-001

- WAFER
- 200:间距2.0mm
- 02:WAFER TYPE2
- 0:UL94V-0
- PIN:
  102:1*2P
  103:1*3P
  .....
  120:1*20P
- WR2:90°
  WR1:90° 带K脚
- SN:镀锡
- C:PA66
- P：袋装
- WE:白色
- 流水码

BZOOC

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. AX.T	TITLE: 2.00MM PITCH 90° WAFER TYPE2
.X± 0.35	X.°± 1.5°		
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

东莞市柏洲电子有限公司
Dongguan Bzooc Electronics, Ltd

Pb Process Capable RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
MATERIAL:Pin:Brass/Tin or Nickel
Insulator:LCP,UL94V-0

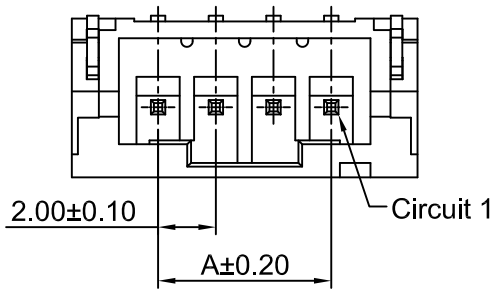

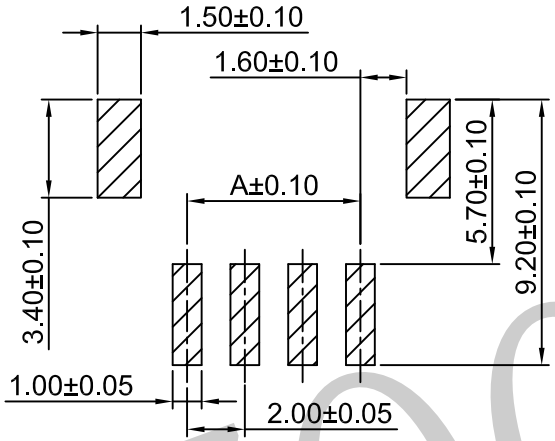

P.C.B LAYOUT



PIN NO.	Dimensions	
	A	B
02P	2.00	8.00
03P	4.00	10.00
04P	6.00	12.00
05P	8.00	14.00
06P	10.00	16.00
07P	12.00	18.00
08P	14.00	20.00
09P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
13P	24.00	30.00
14P	26.00	32.00
15P	28.00	34.00
16P	30.00	36.00
17P	32.00	38.00
18P	34.00	40.00
19P	36.00	42.00
20P	38.00	44.00

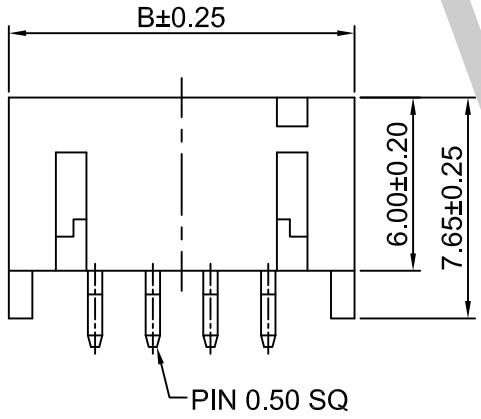

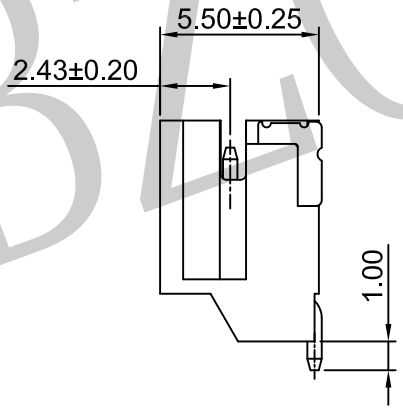

W 200-020-1XX-WRS-SN-F-X-PC-000

WAFER
200:间距2.0MM
02:WAFER TYPE2
0:UL94V-0
PIN:
102:1*2P
103:1*3P
.....
120:1*20P
90°-SMT
流水码
PC:本色
T：管装
R：卷装
F:LCP
SN:镀锡

BZOOC

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. AX.T	TITLE: 2.00MM PITCH 90° WAFER-SMT TYPE TYPE2
.X± 0.35	X.°± 1.5°		
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

东莞市柏洲电子有限公司
Dongguan Bzooc Electronics, Ltd

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
MATERIAL:Pin:Brass/Tin or Nickel
Insulator:LCP,UL94V-0

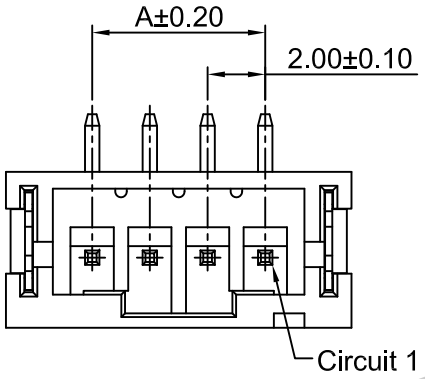

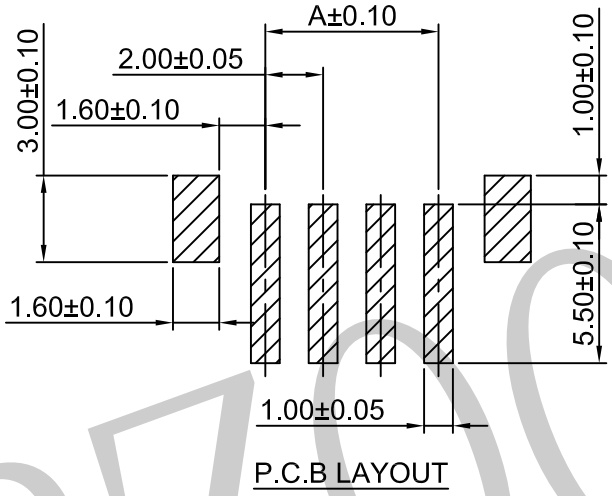

P.C.B LAYOUT



PIN NO.	Dimensions A	B
02P	2.00	8.00
03P	4.00	10.00
04P	6.00	12.00
05P	8.00	14.00
06P	10.00	16.00
07P	12.00	18.00
08P	14.00	20.00
09P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
13P	24.00	30.00
14P	26.00	32.00
15P	28.00	34.00
16P	30.00	36.00
17P	32.00	38.00
18P	34.00	40.00
19P	36.00	42.00
20P	38.00	44.00

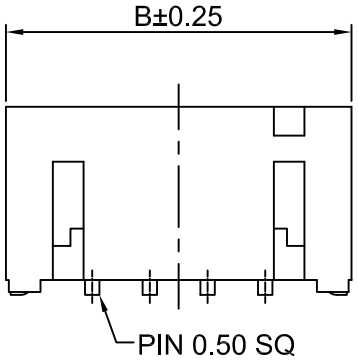

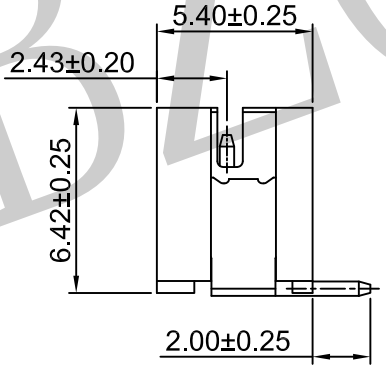

W 200-020-1XX-WVS-SN-F-RC-PC-000

- WAFER
- 200:间距2.0mm
- 02:WAFER TYPE2
- 0:UL94V-0
- PIN:
  - 102:1*2P
  - 103:1*3P
  - .....
  - 120:1*20P
- 180°-SMT
- SN:镀锡
- F:LCP
- T：管装
  RC:卷装+CAP
- PC:本色
- 流水码

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED			东莞市柏洲电子有限公司 Dongguan Bzooc Electronics,Ltd
.X± 0.35	X.°± 1.5°	APR. AX.T	TITLE: 2.00MM PITCH 180° WAFER-SMT TYPE2
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

BZOOC

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Phosphor Bronze
Wire Range:AWG#24-#30
Insulation O.D.:1.50mm(max)
Qty/reel:10,000 PCS

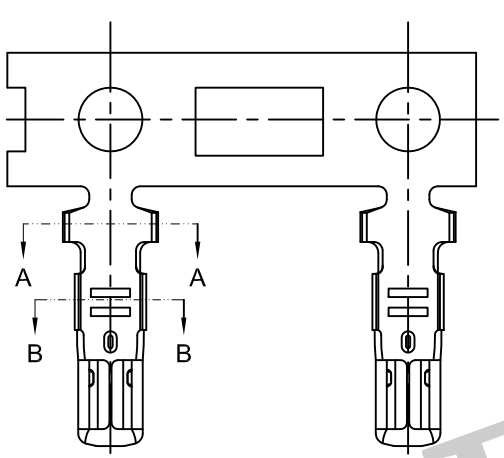



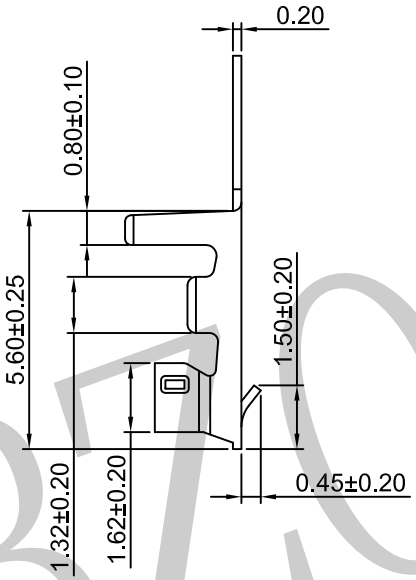





W 200-02F-PDJ-SN-000

- WAFER
- 200:PITCH 2.0MM
- 02:WAFER TYPE2
- F:FEMALE TERMINAL
- P:PHOSPHOR BRONZE
- DJ:LOW. PIN
- SN:TIN PLATING
  GF:GOLD PLATING
- SERIAL NO.

BZOOC

REV.	ECN. NO.	APR.	DATE
A0	FIRST RELEASE	Y.L	2019.06.21

TOLERANCE UNLESS OTHERWISE SPECIFIED			东莞市柏洲电子有限公司 Dongguan Bzooc Electronics,Ltd
.X± 0.35	X.°± 1.5°	APR. AX.T	TITLE: 2.00MM PITCH CRIMP TERMINAL TYPE2
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1

Pb Process Capable | RoHS Compliant

Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Nylon 66,UL94V-0

PIN NO.	Dimensions	
	A	B
2P	2.00	5.80
3P	4.00	7.80
4P	6.00	9.80
5P	8.00	11.80
6P	10.00	13.80
7P	12.00	15.80
8P	14.00	17.80
9P	16.00	19.80
10P	18.00	21.80
11P	20.00	23.80
12P	22.00	25.80
13P	24.00	27.80
14P	26.00	29.80
15P	28.00	31.80
16P	30.00	33.80
17P	32.00	35.80
18P	34.00	37.80
19P	36.00	39.80
20P	38.00	41.80

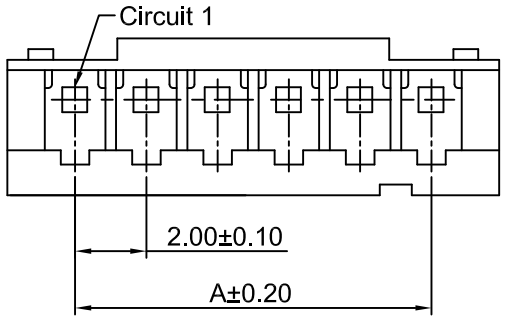



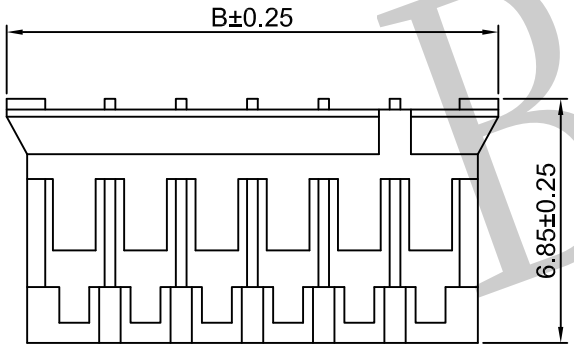

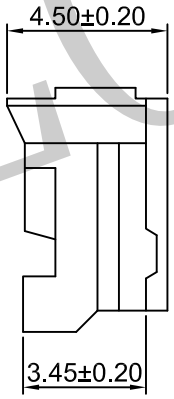

W 200-020-1XX-HM-WE-C-P-000

- WAFER
- 200:间距2.0mm
- 02:WAFER TYPE2
- 0:UL94V-0
- PIN NO.:
  102:1*2P
  103:1*3P
  ...
  120:1*20P
- HM:MALE HOUSING
- WE:WHITE
- C:PA66
- PACKING:BAG
- SERIAL NO.

BZOOC

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED			东莞市柏洲电子有限公司 Dongguan Bzooc Electronics,Ltd
.X± 0.35	X.°± 1.5°	APR. AX.T	TITLE: 2.00MM PITCH HOUSING TYPE2
.XX± 0.25	.X°± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX°± 0.5°	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 CUSTOMER DRAWING SHEET. 1/1