




Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1000V AC/minute
Compliant with RoHS and REACH

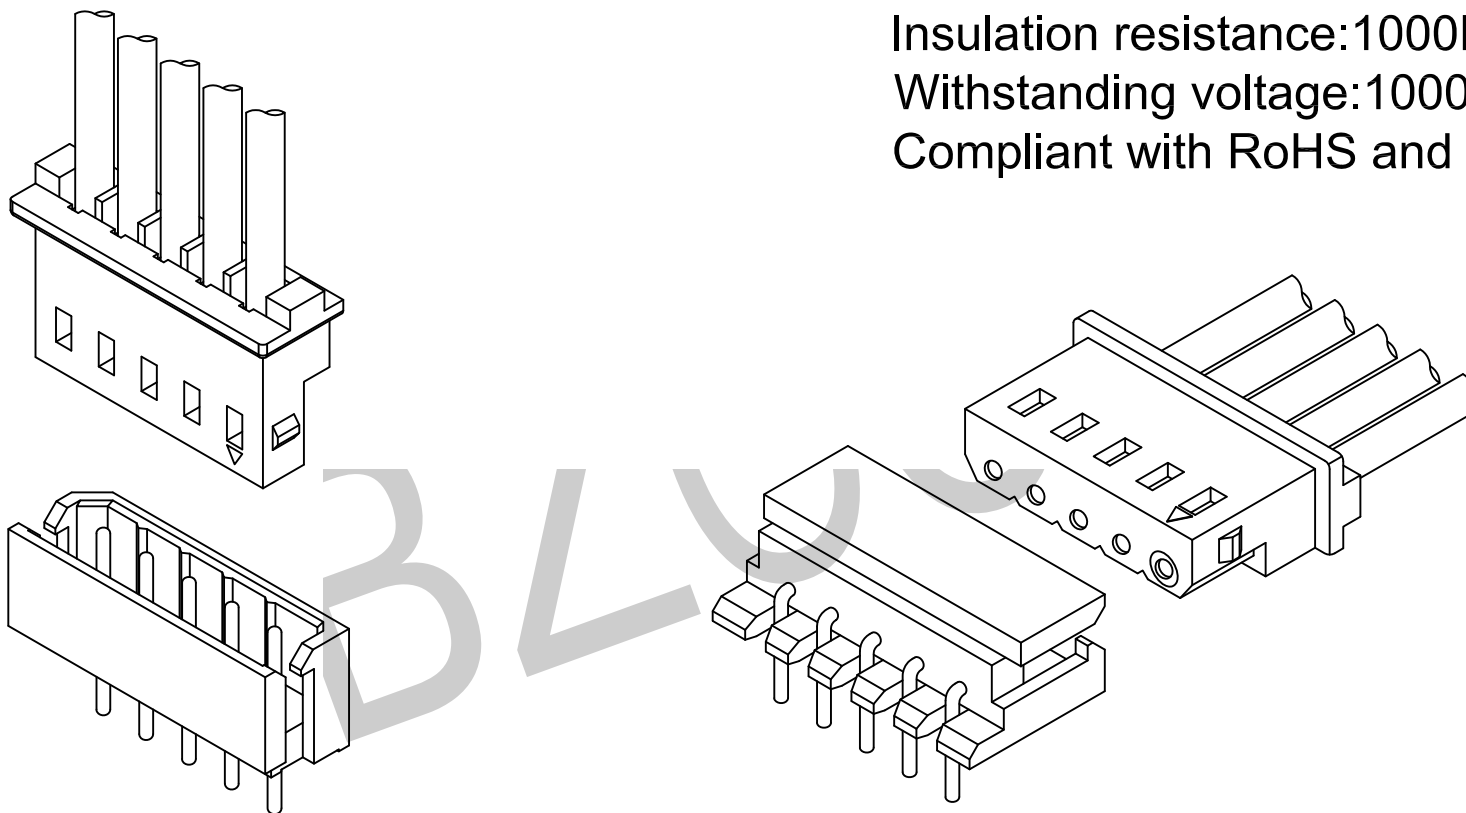

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd				
.X± 0.35	X.*± 1.5*			APR. AX.T	TITLE: W250-01 TYPE WAFER	
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.			
1.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ. 	UNITS. MM	SCALE. 1:1	SHEET. 1 / 1
			CUSTOMER DRAWING			



A





B

C

D


E

F

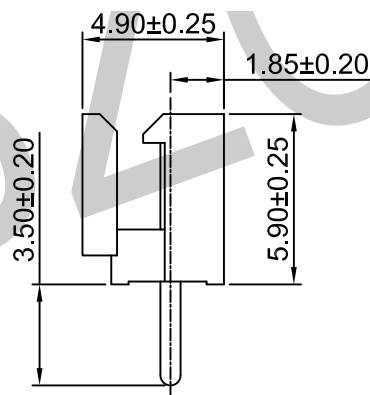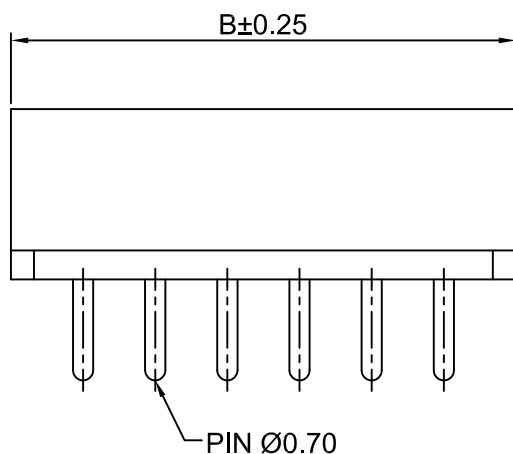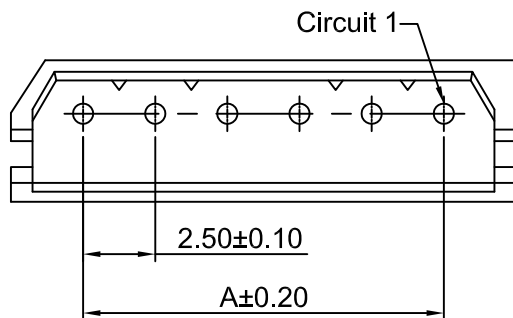


PIN NO.	Dimensions	
	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00
16P	37.50	42.50
17P	40.00	45.00
18P	42.50	47.50
19P	45.00	50.00
20P	47.50	52.50

Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1000V AC/minute
*Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

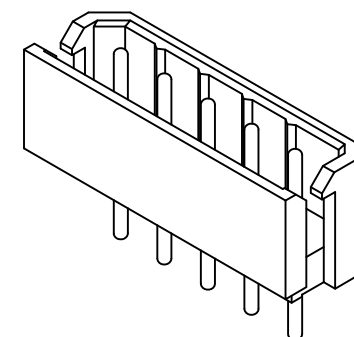

W 250-010-1XX-WV-SN-C-P-PC-000
WAFFER
250:间距2.5mm
01:WAFFER TYPE1
0:UL94V-0
PIN:
102:1*2P
103:1*3P
.....
120:1*20P
流水码
PC:本色
P: 袋装
C:PA66
SN:镀锡
WV:180°

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	.X*± 1.5°	APR. AX.T	TITLE: 2.50MM PITCH SINGLE ROW ROUND PIN 180° TYPE1
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE: 1:1 SHEET. 1/1
		CUSTOMER DRAWING	

1 2 3 4 5 6 7 8



A





B

C

D


E

F

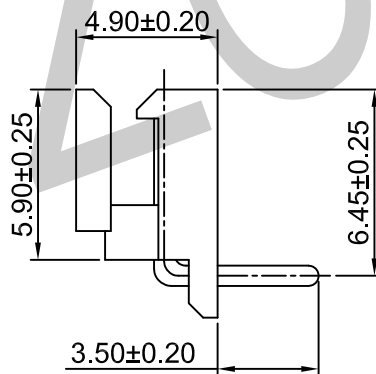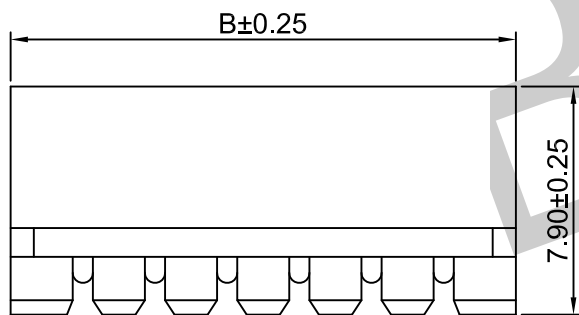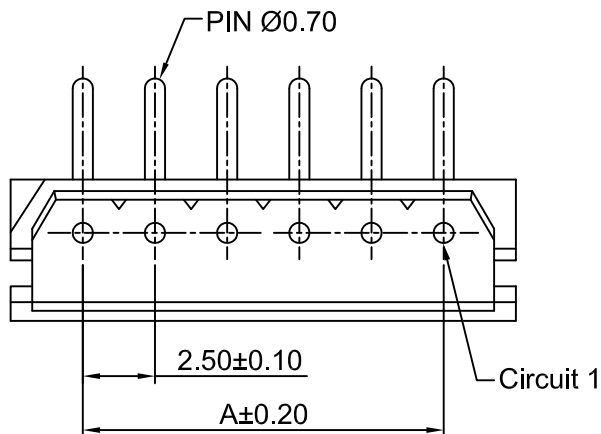

PIN NO.	Dimensions	
	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00
16P	37.50	42.50
17P	40.00	45.00
18P	42.50	47.50
19P	45.00	50.00
20P	47.50	52.50

Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1000V AC/minute
*Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

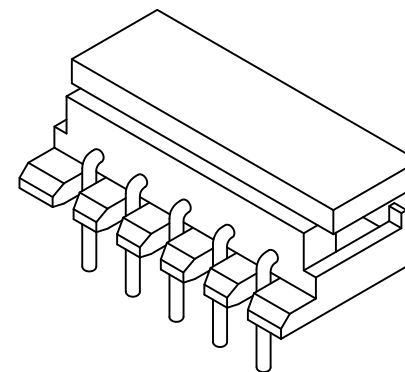

W 250-010-1XX-WR-SN-C-P-PC-004
WAFFER
250:间距2.5mm
01:WAFFER TYPE1
0:UL94V-0
PIN:
102:1*2P
103:1*3P
.....
120:1*20P
WR:90°
流水码
PC:本色
P:袋装
C:PA66
SN:镀锡

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: 2.50MM PITCH SINGLE ROW ROUND PIN 90° TYPE1
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ. UNITS. MM SCALE: 1:1 SHEET. 1/1
		CUSTOMER DRAWING	

A

B

C


D

E

F



Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1000V AC/minute
Material:Phosphor Bronze
Wire Range:AWG#22-#28
Qty/reel:10,000 PCS

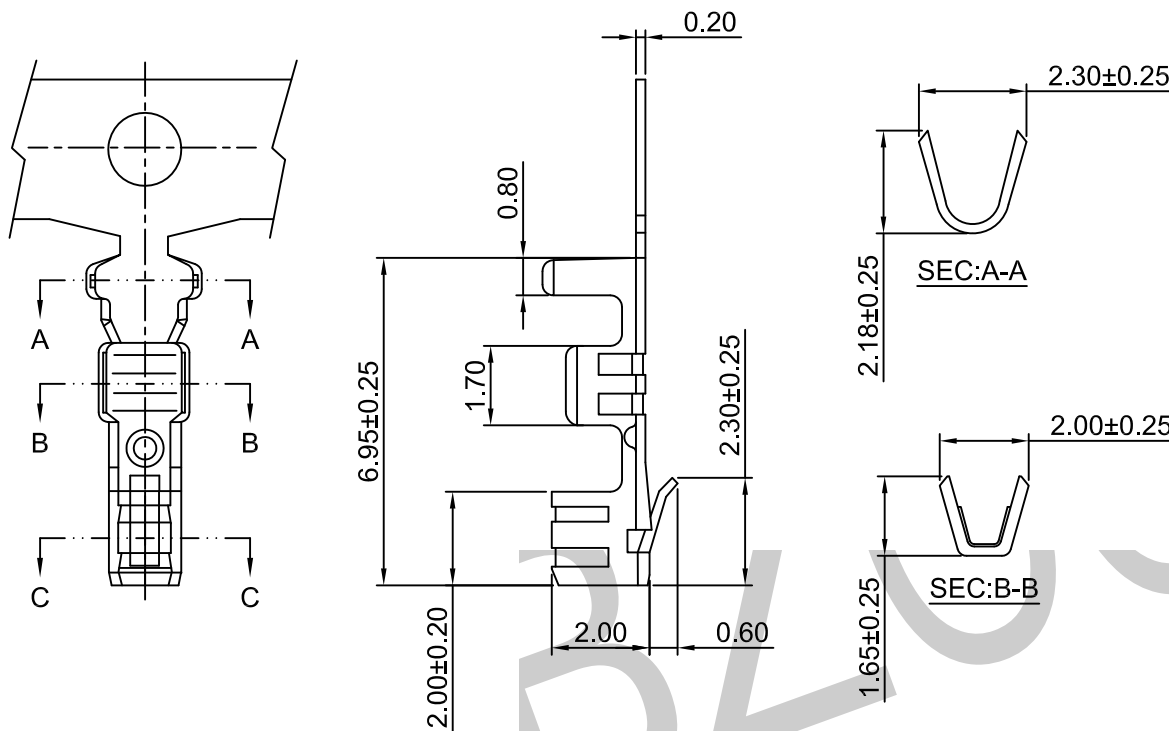

Wafer — W 250-01F-PDJ-SN-000 — Serial No.
250:Pitch 2.5mm —
01:Wafer Type 1 — SN:Tin Plating
F:Female Terminal — GF:Gold Plating
P:Phosphor Bronze — DJ:Low. PIN





A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED				BZOOC 东莞市柏洲电子有限公司 Dongguan Bzooc Electronics, Ltd			
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: 2.50MM PITCH CRIMP TERMINAL TYPE1				
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.				
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ.		UNITS. MM	SCALE. 1:1	SHEET. 1/1
				CUSTOMER DRAWING			




Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1000V AC/minute
Material:Nylon 66,UL94V-0

PIN NO.	Dimensions	
	A	B
2P	2.50	5.80
3P	5.00	8.30
4P	7.50	10.80
5P	10.00	13.30
6P	12.50	15.80
7P	15.00	18.30
8P	17.50	20.80
9P	20.00	23.30
10P	22.50	25.80
11P	25.00	28.30
12P	27.50	30.80
13P	30.00	33.30
14P	32.50	35.80
15P	35.00	38.30
16P	37.00	40.80
17P	39.50	43.30
18P	42.00	45.80
19P	44.50	48.30
20P	47.00	50.80

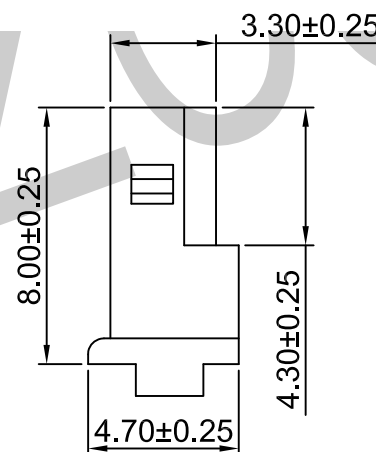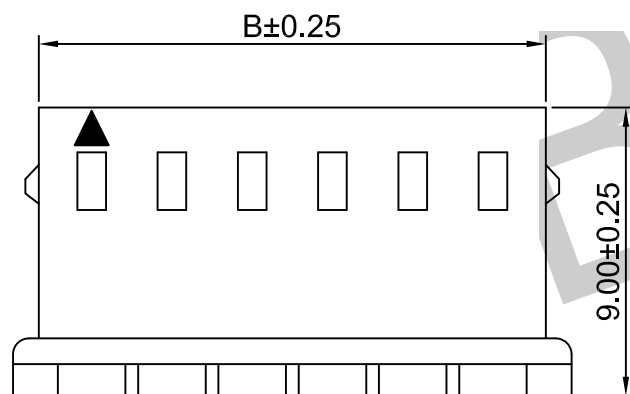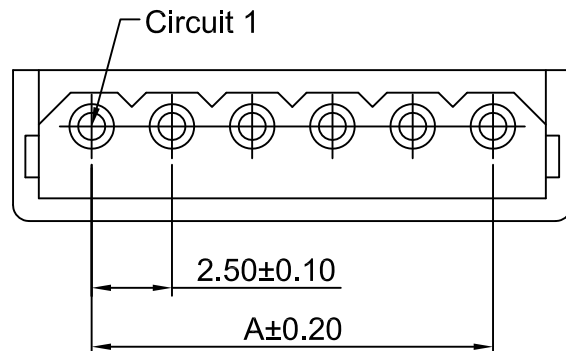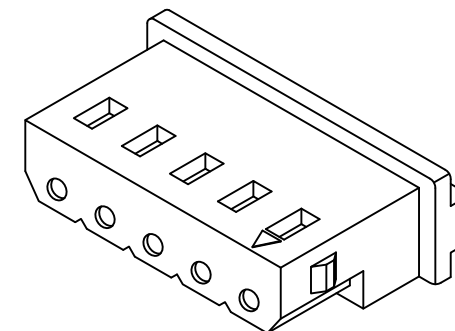

W 250-010-1XX-HM-WE-C-P-000
WAFFER
250:间距2.50mm
01:WAFFER TYPE 1
0:UL94V-0
PIN NO. :
102:1*2P
103:1*3P
...
120:1*20P
SERIAL NO.
P: PACKING: BAG
C:PA66
WE: WHITE
HM: MALE HOUSING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 2.50MM PITCH SINGLE ROW HOUSING TYPE1 H:9.0
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE: 1:1 SHEET. 1 / 1
		CUSTOMER DRAWING	