



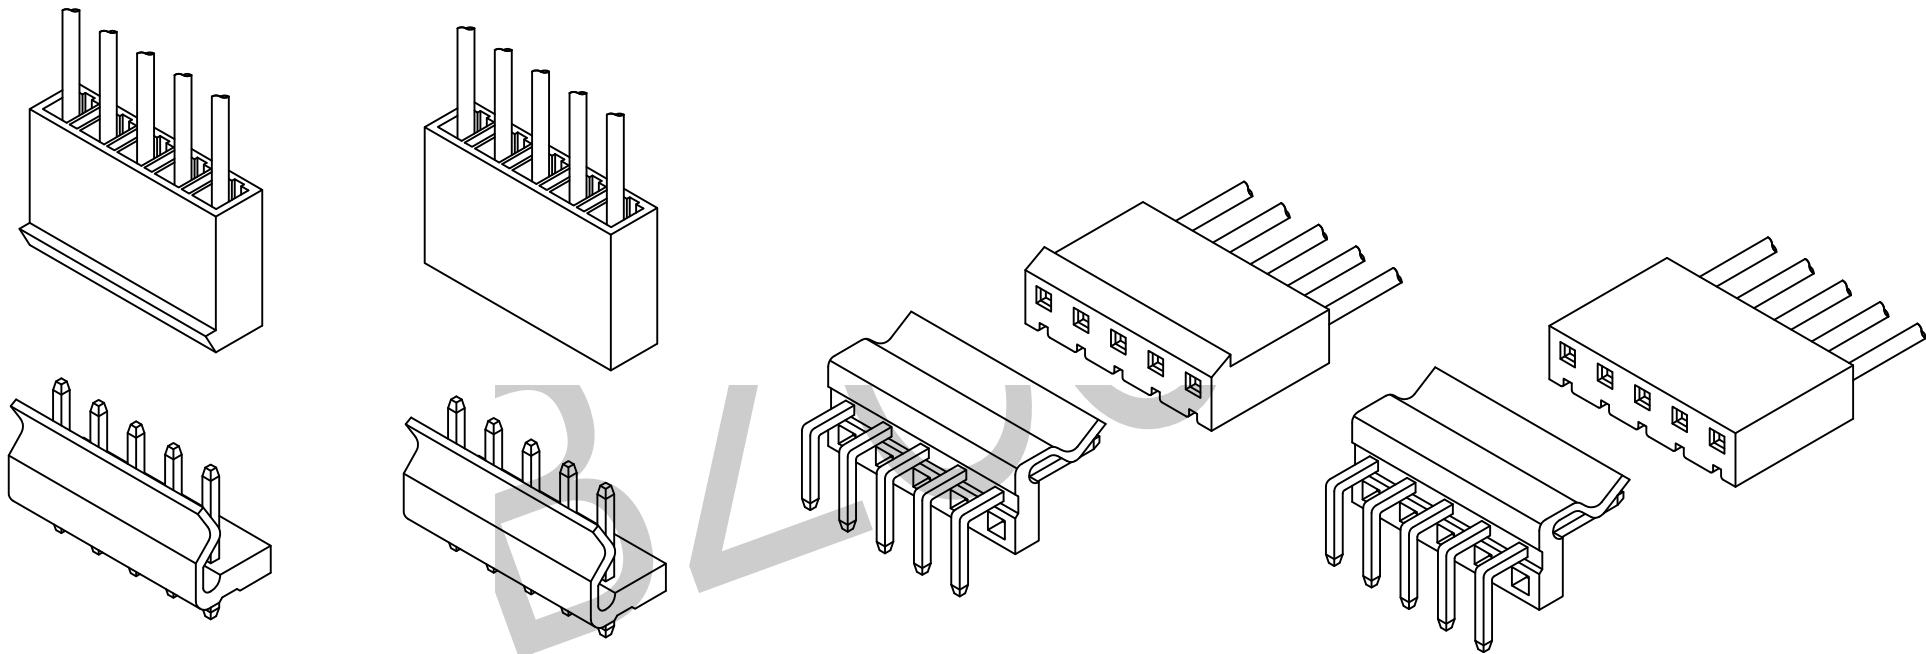

Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1500V AC/minute
Compliant with RoHS and REACH






A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE


TOLERANCE UNLESS OTHERWISE SPECIFIED		 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd			
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: W508-01TYPE WAFER		
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.		
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ. 	UNITS. MM SCALE. 1:1 CUSTOMER DRAWING	SHEET. 1 / 1




Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1500V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-2

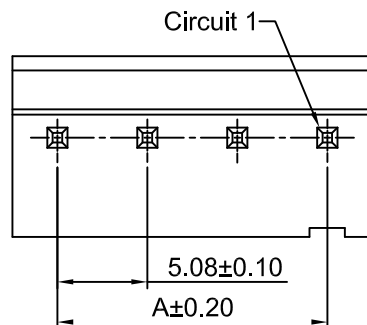

PIN NO.	Dimensions	
	A	B
02P	5.08	10.16
03P	10.16	15.24
04P	15.24	20.32
05P	20.32	25.40
06P	25.40	30.48
07P	30.48	35.56
08P	35.56	40.64
09P	40.64	45.72
10P	45.72	50.80
11P	50.80	55.88
12P	55.88	60.96
13P	60.96	66.04
14P	66.04	71.12
15P	71.12	76.20
16P	76.20	81.28
17P	81.28	86.36
18P	86.36	91.44
19P	91.44	96.52
20P	96.52	101.60



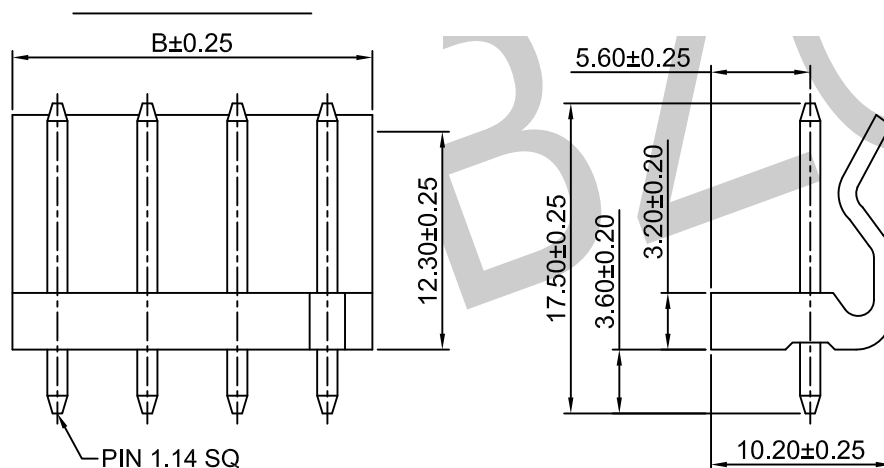


W 508-012-1XX-WV-SN-C-P-PC-000
WAFFER SERIAL NO.
508:PITCH5.08MM
01:WAFFER TYPE1
2:UL94V-2
PC:PRIMARY COLORS
PACKING:BAG
C:PA66
SN:TIN PLATING
PIN NO.:
102:1*2P
103:1*3P
...
120:1*20P
180°



TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH 180° WAFFER TYPE1
.XX± 0.25	.X.*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX.*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE: 1:1 SHEET. 1 / 1
REV.	ECN. NO.	APR.	DATE



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1500V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-2

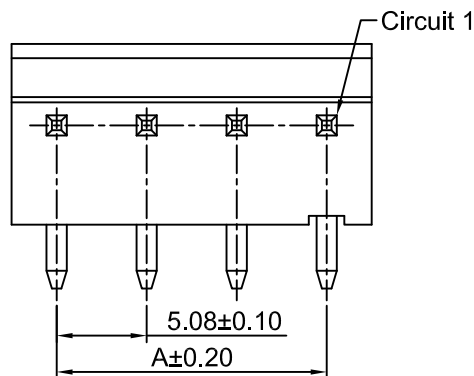


PIN NO.	Dimensions	
	A	B
02P	5.08	10.16
03P	10.16	15.24
04P	15.24	20.32
05P	20.32	25.40
06P	25.40	30.48
07P	30.48	35.56
08P	35.56	40.64
09P	40.64	45.72
10P	45.72	50.80
11P	50.80	55.88
12P	55.88	60.96
13P	60.96	66.04
14P	66.04	71.12
15P	71.12	76.20
16P	76.20	81.28
17P	81.28	86.36
18P	86.36	91.44
19P	91.44	96.52
20P	96.52	101.60

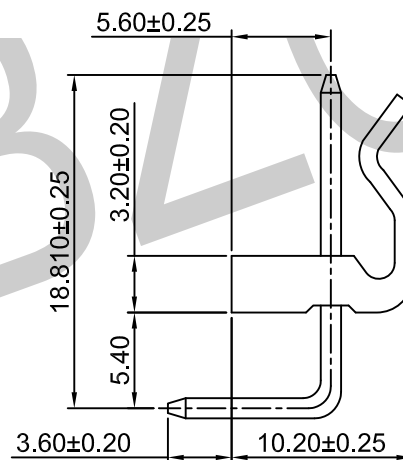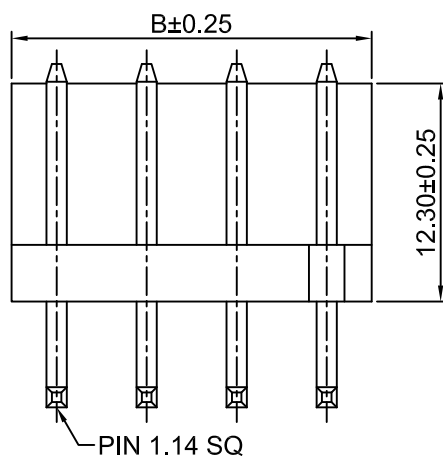



W 508-012-1XX-WR-SN-C-P-PC-000
WAFFER SERIAL NO.
508:PITCH5.08MM
01:WAFFER TYPE1
2:UL94V-2
PIN NO.:
102:1*2P
103:1*3P
...
120:1*20P
90°
PC:PRIMARY COLORS
PACKING:BAG
C:PA66
SN:TIN PLATING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH 90° WAFFER TYPE1
.XX± 0.25	.X.*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX.*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE: 1:1 SHEET. 1/1
		CUSTOMER DRAWING	



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1500V AC/minute
Material:Brass/Phosphor Bronze
Wire Range:AWG#18-#24
Insulation O.D.:2.80mm(max)
Qty/reel:6,000 PCS

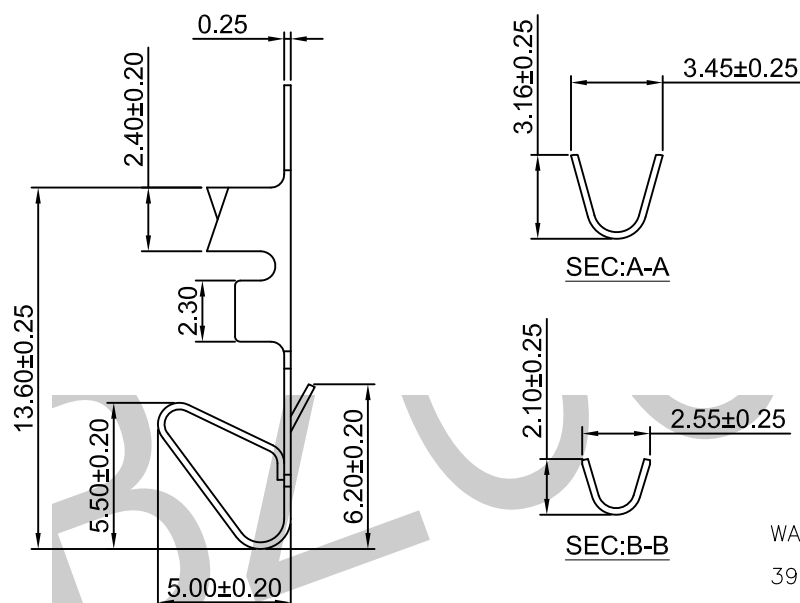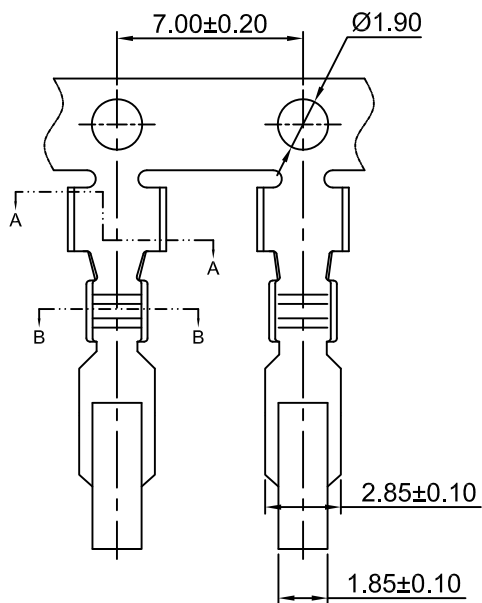

W 396-01F-XDJ-SN-000
WAFER ——— SERIAL NO.
396:PITCH 3.96MM ——— SN:TIN PLATING
01:WAFER TYPE1 ——— GF:GOLD PLATING
F:FEMALE TERMINAL ——— DJ:LOW. PIN
P:PHOSPHOR BRONZE
B:BRASS





A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOOC 东莞市柏洲电子有限公司 Dongguan Bzooc Electronics, Ltd			
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 3.96MM PITCH CRIMP TERMINAL TYPE1		
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.		
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.	UNITS. MM SCALE. 1:1 CUSTOMER DRAWING	SHEET. 1 / 1



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:1500V AC/minute
Material:Nylon 66,UL94V-2

PIN NO.	Dimensions	
	A	B
02P	5.08	10.08
03P	10.16	15.16
04P	15.24	20.24
05P	20.32	25.32
06P	25.40	30.40
07P	30.48	35.48
08P	35.56	40.56
09P	40.64	45.64
10P	45.72	50.72
11P	50.80	55.80
12P	55.88	60.88
13P	60.96	65.96
14P	66.04	71.04
15P	71.12	76.12
16P	76.20	81.20
17P	81.28	86.28
18P	86.36	91.36
19P	91.44	96.44
20P	96.52	101.52

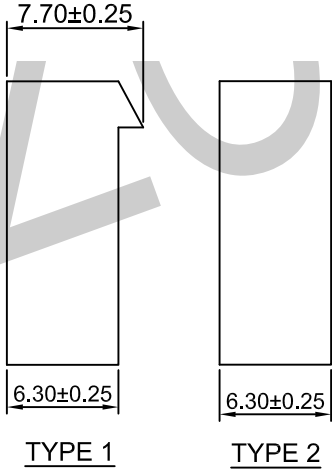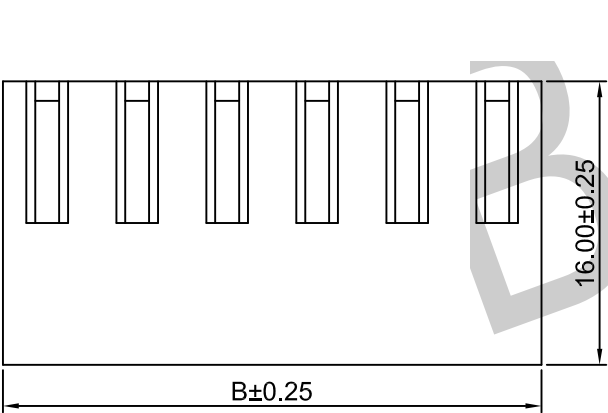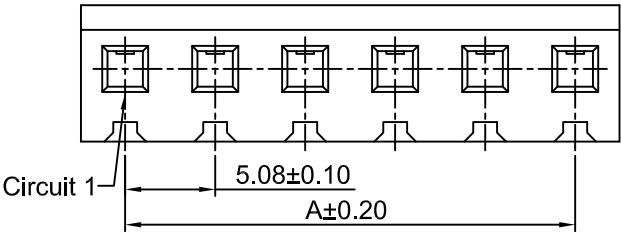

W 508-012-1XX-HM-PC-C-P-XXX
WAFER ——— W 508-012-1XX-HM-PC-C-P-XXX
508:PITCH5.08MM ———
01:WAFER TYPE1 ———
2:UL94V-2 ———
PIN NO.: ———
102:1*2P ———
103:1*3P ———
... 120:1*20P ———
000:TYPE1
001:TYPE2
PACKING:BAG
C:PA66
PC:PRIMARY COLORS
HM:MALE HOUSING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOOO 东莞市柏洲电子有限公司 Dongguan Bzoooc Electronics, Ltd	
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: 5.08MM PITCH HOUSING TYPE1
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 SHEET. 1/1
		CUSTOMER DRAWING	