



RoHS
Compliant

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:






1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Ternraplastics,
U1 94V-0 LCP Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: SPCC

电镀:Finish:


1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

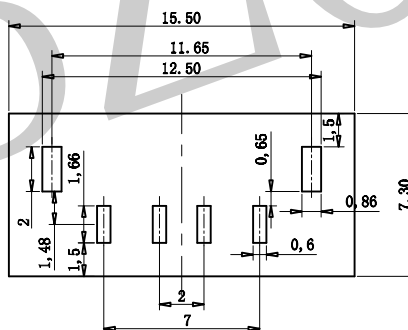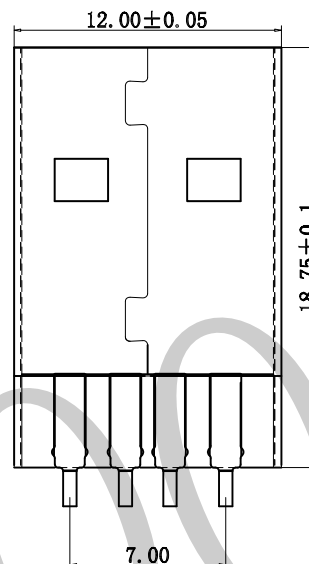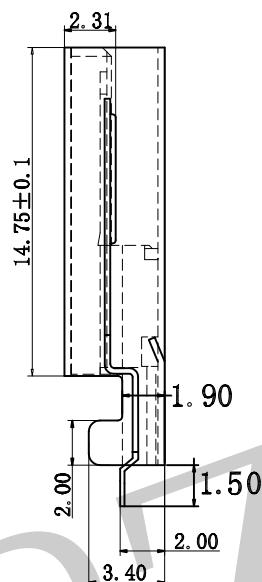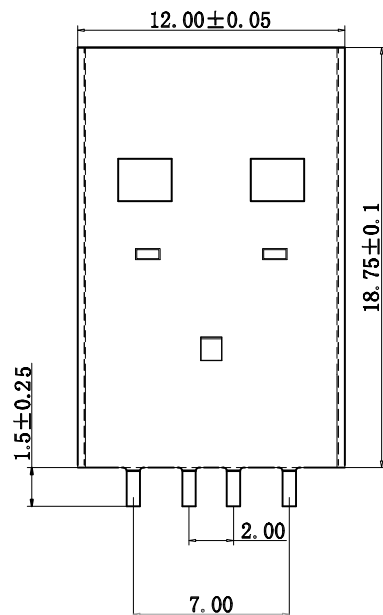

PCB LAYOUT

U A20-M-04-20N-CRS-B-SG-F-D-000
USB A型 2.0
M:公头(插头)
04:4PIN
外壳材质:
20:铁壳
N:镀镍
沉板2.5MM
包装方式
D:盒装
塑胶材质:
F:LCP
端子电镀:亮锡半金
端子材质:黄铜
90°沉板 SMT

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: USB AM 沉板直角无柱(沉板2.5)
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE. 1:1 SHEET. 1/1
		CUSTOMER DRAWING	