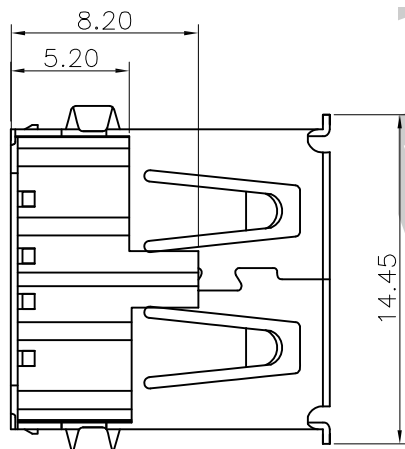
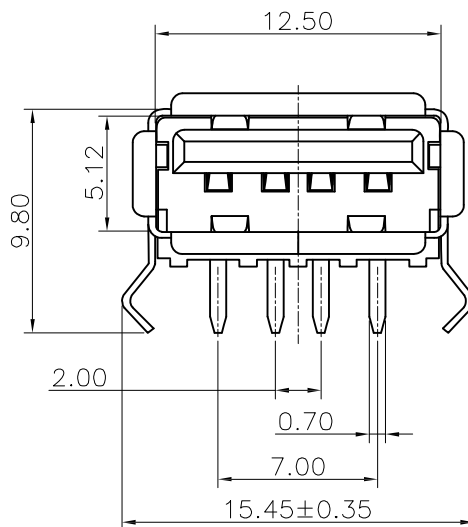
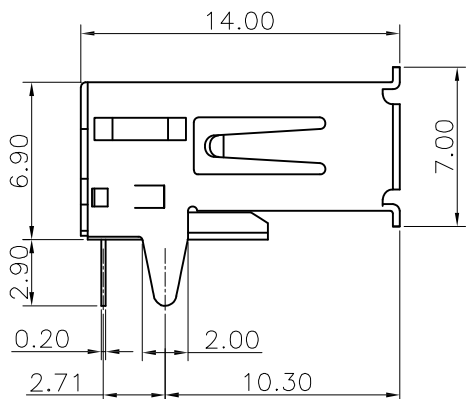


PCB. LAYOUT

TOL: ± 0.05

NOTES:

1. MATERIAL:

1.1 Housing: thermoplastic plastics

1.2 terminals: Copper Alloy

Gold plated in contact area:

Tin plated in termination

Nickel Plated overall

1.3 Shell: Steel & Copper Alloy

Nickel Plated overall

2. ELECTRICAL CHARACTERISTICS:

2.1 Rating Current : 1.5 Ampere

2.2 Rating Voltage : 30 V Max

2.3 Contact Resistance: 30 Milli ohms

2.4 Insulation Resistance: 1000 Mega ohms Min.

3. MECHANICAL CHARACTERISTICS:

3.1 Connector Mating force: 35N MAX (3.57Kgf)


3.2 Connector Unmating force: 10N min (1.02Kgf)

3.3 Durability: 1500 Cycles.


4. ENVIRONMENT CHARACTERISTICS:

4.1 Operating temperature: -0°C to $+50^{\circ}\text{C}$

4.2 Storage temperature: -20°C to $+60^{\circ}\text{C}$

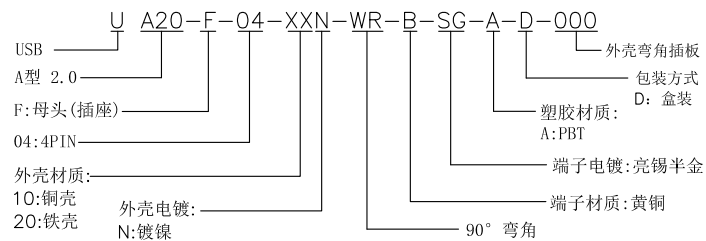

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X $\pm$ 0.35	X.* $\pm$ 1.5*	APR. AX.T	TITLE: USB2.0 A/F 90度 弯角
.XX $\pm$ 0.25	.X* $\pm$ 1.0*	CHK. Y.L	PART NO.
.XXX $\pm$ 0.15	.XX* $\pm$ 0.5*	DRA. Y.L	PROJ. 
		UNITS. MM	SCALE. 1:1
		CUSTOMER DRAWING	
		SHEET. 1 / 1	