






Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Compliant with RoHS and REACH



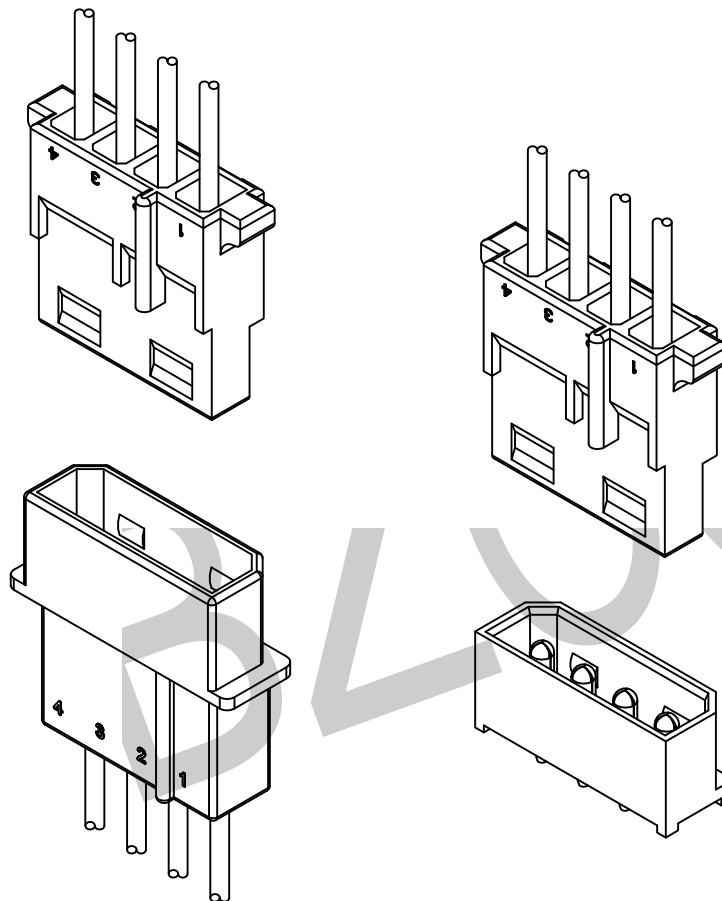


A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE



TOLERANCE UNLESS OTHERWISE SPECIFIED			 东莞市柏洲电子有限公司 Dongguan Bzooc Electronics, Ltd			
.X± 0.35	X.*± 1.5°	APR. AX.T			TITLE: W508-02 TYPE WAFER	
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.			
1 .XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ. 	UNITS. MM	SCALE. 1:1	SHEET. 1 / 1
			CUSTOMER DRAWING			



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-2

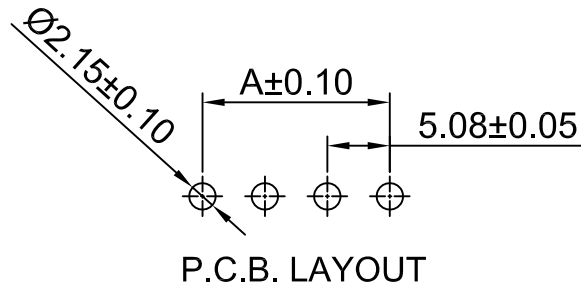

PIN NO.	A	B
2P	5.08	13.48
3P	10.16	18.56
4P	15.24	23.64

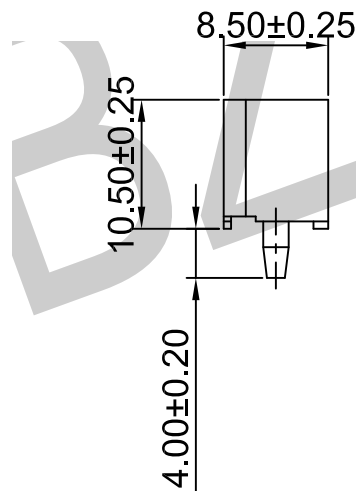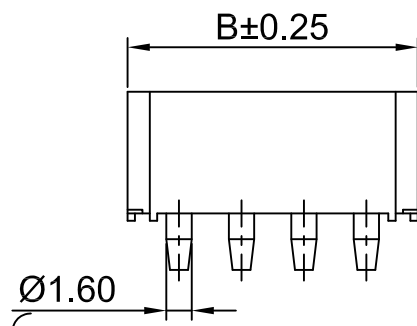

WAFER W 508-022-1XX-WV-SN-C-P-TC-000 SERIAL NO.
508:PITCH5.08MM
02WAFER TYPE2
2:UL94V-2
PIN: 102:1*2P 103:1*3P 104:1*4P
180°
TRANSPARENT COLOR
PACKING:BAG
C:PA66
SN:TIN PLATING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	.X'± 1.5'	APR. AX.T	TITLE: 5.08MM PITCH 180° WAFER TYPE2
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO.
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ. UNITS. MM SCALE: 1:1 SHEET. 1/1
		CUSTOMER DRAWING	



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-2

A

B

C

D

E

F

A




B

C

D



E

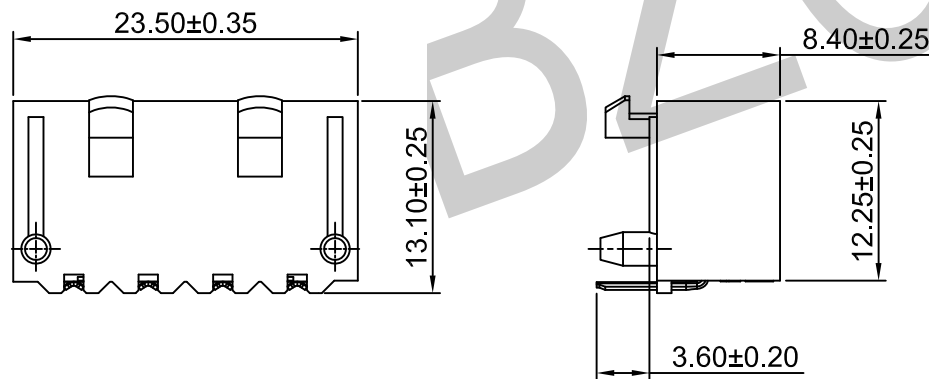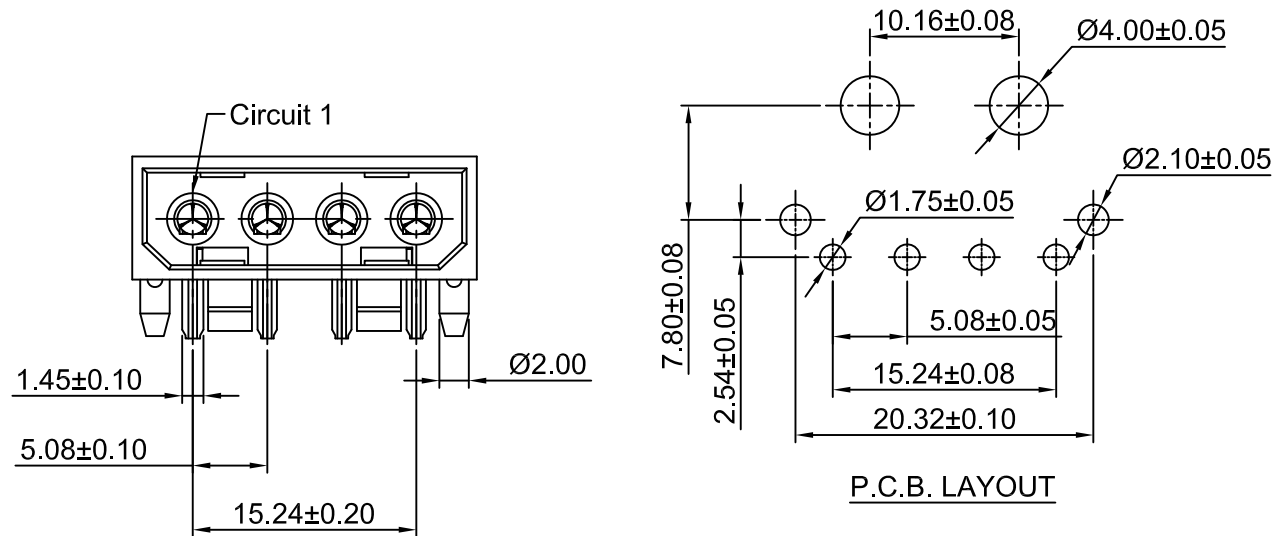F








WAFFER W 508-022-104-WR-SN-C-P-TC-001 SERIAL NO.
508:PITCH5.08MM
02WAFER TYPE2
2:UL94V-2
PIN: 104:1*4P
90°
TRANSPARENT COLOR
PACKING:BAG
C:PA66
SN:TIN PLATING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE



TOLERANCE UNLESS OTHERWISE SPECIFIED		 东莞市柏洲电子有限公司 Dongguan Bzooc Electronics, Ltd	
.X± 0.35	X*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH 90° WAFER TYPE2(001)
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.  UNITS. MM SCALE: 1:1 SHEET. 1 / 1 CUSTOMER DRAWING



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Pin:Brass/Tin over Nickel
Metal Band:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0

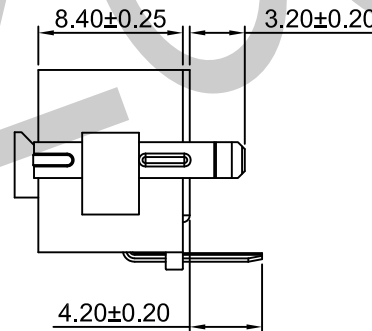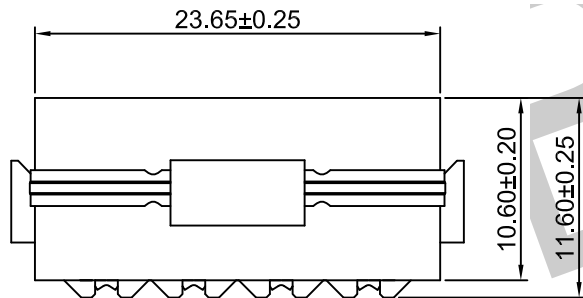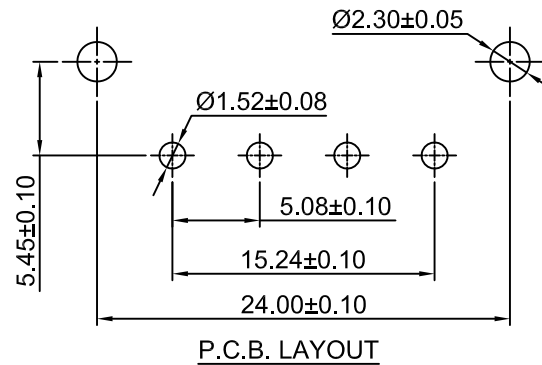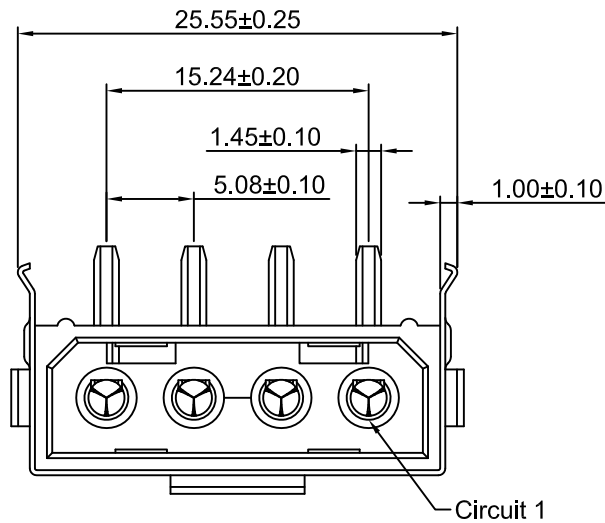



W 508-020-104-WR-SN-C-P-BK-000
WAVER 508:PITCH5.08MM SERIAL NO.
02WAVER TYPE2 BLACK
0:UL94V-0 PACKING:BAG
PIN: 104:1*4P C:PA66
90° SN:TIN PLATING

TOLERANCE UNLESS OTHERWISE SPECIFIED		 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: 5.08MM PITCH 90° WAFER TYPE2
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ.  UNITS. MM SCALE. 1:1 CUSTOMER DRAWING
		SHEET. 1 / 1	




A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE






Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Nylon 66,UL94V-2

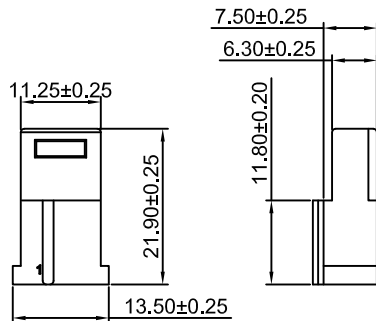


02P

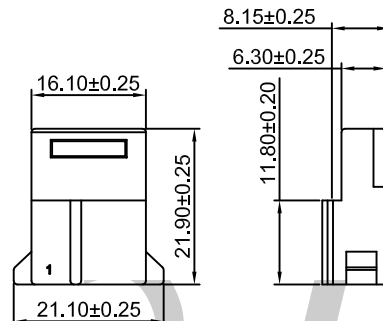

03P

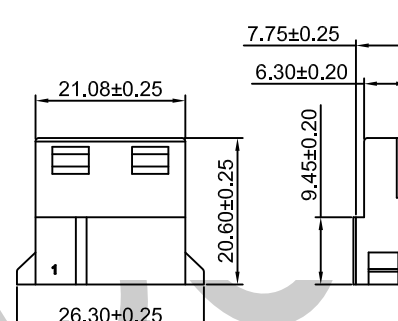



04P




W 508-022-1XX-HF-PC-C-P-000
WAFFER _____ SERIAL NO.
508:PITCH5.08MM _____ PACKING:BAG
02:WAFFER TYPE2 _____ C:PA66
2:UL94V-2 _____ PRIMARY COLORS
PIN NO.: _____ HF:FEMALE HOUSING
102:1*2P
103:1*3P
104:1*4P

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED				东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd		
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH FEMALE HOUSING TYPE2			
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.			
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ. 	UNITS. MM	SCALE. 1:1	SHEET. 1 / 1
				CUSTOMER DRAWING		



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Brass/Phosphor Bronze
Wire Range:AWG#18-#24
Insulation O.D.:2.50mm(max)
Qty/reel:7,000 PCS

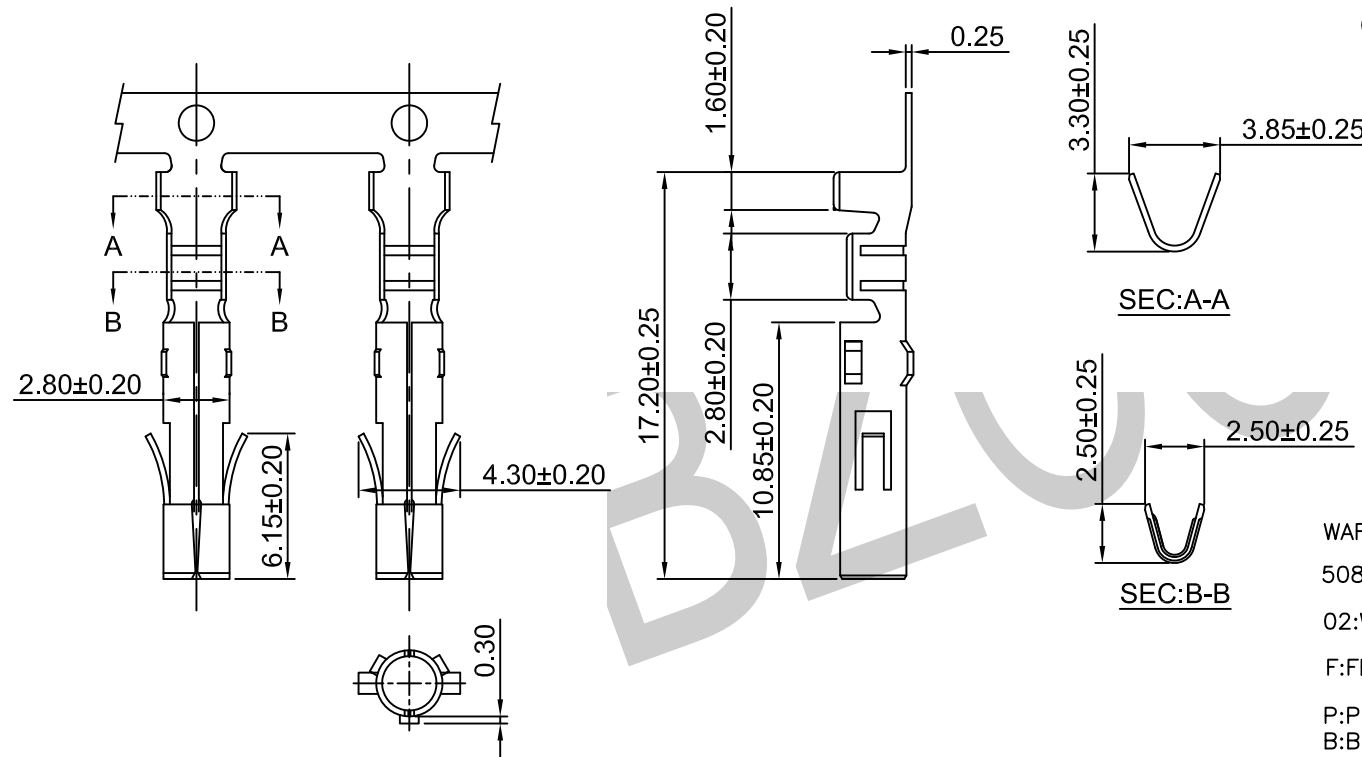






W 508-02F-XDJ-SN-000
WAFFER ——— W 508-02F-XDJ-SN-000 SERIAL NO.
508:PITCH5.08MM
02:WAFFER TYPE2 SN:TIN PLATING
F:FEMALE TERMINAL GF:GOLD PLATING
P:PHOSPHOR BRONZE DJ:LOW. PIN
B:BRASS

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE


TOLERANCE UNLESS OTHERWISE SPECIFIED				BZOO 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd			
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE:	5.08MM PITCH CRIMP FEMALE TERMINAL TYPE2			
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.				
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ.		UNITS. MM	SCALE: 1:1	SHEET. 1 / 1
				CUSTOMER DRAWING			






Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Nylon 66,UL94V-2

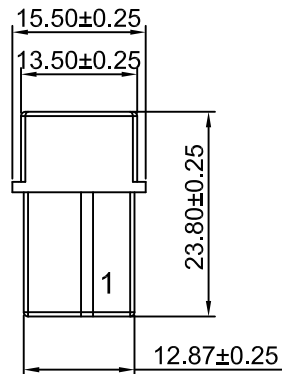



02P~03P

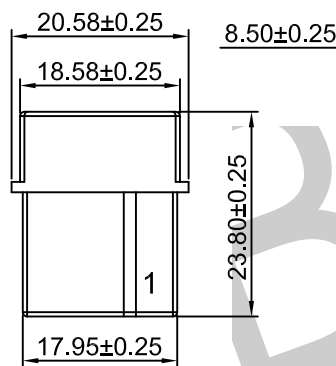

04P

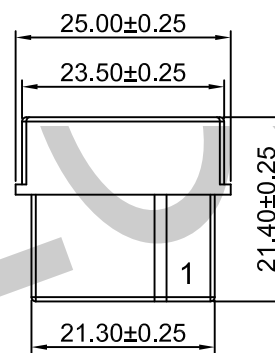


W 508-022-1XX-HM-PC-C-P-000
WAFFER ——— SERIAL NO.
508:PITCH5.08MM ——— PACKING:BAG
02:WAFFER TYPE2 ——— C:PA66
2:UL94V-2 ——— PRIMARY COLORS
PIN NO.: ——— HM:MALE HOUSING
102:1*2P
103:1*3P
104:1*4P

TOLERANCE UNLESS OTHERWISE SPECIFIED		 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd				
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH MALE HOUSING TYPE2			
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.			
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ. 	UNITS. MM	SCALE. 1:1	SHEET. 1 / 1
			CUSTOMER DRAWING			



A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE



Current rating:7A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1500V AC/minute
Material:Brass/Phosphor Bronze
Wire Range:AWG#18-#24
Insulation O.D.:2.50mm(max)
Qty/reel:7,000 PCS

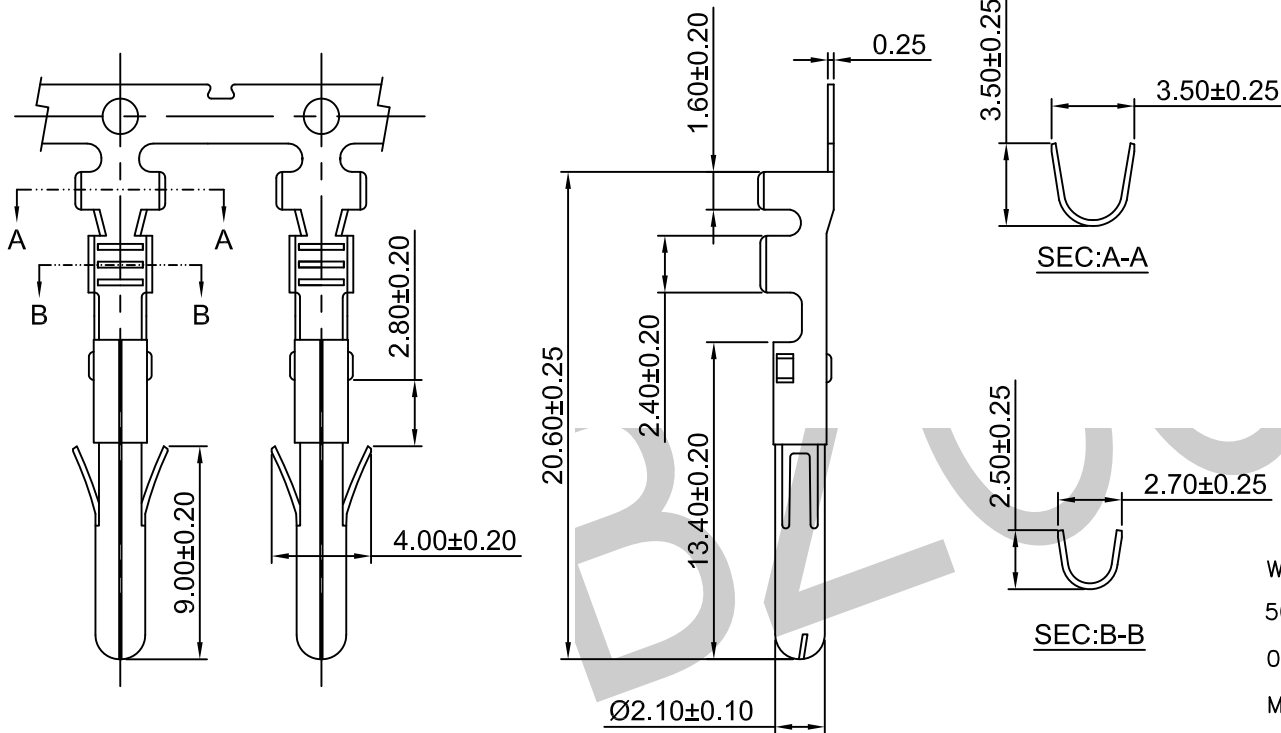

W 508-02M-XDJ-SN-000
WAIVER ——— SERIAL NO.
508:PITCH5.08MM ——— SN:TIN PLATING
02:WAIVER TYPE2 ——— GF:GOLD PLATING
M:MALE TERMINAL ——— DJ:LOW. PIN
P:PHOSPHOR BRONZE ———
B:BRASS

TOLERANCE UNLESS OTHERWISE SPECIFIED				东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd			
.X± 0.35	X.*± 1.5°	APR. AX.T	TITLE: 5.08MM PITCH CRIMP MALE TERMINAL TYPE2				
.XX± 0.25	.X*± 1.0°	CHK. Y.L	PART NO.				
.XXX± 0.15	.XX*± 0.5°	DRA. Y.L	PROJ. 	UNITS. MM	SCALE. 1:1	SHEET. 1 / 1	
			CUSTOMER DRAWING				